



Engineered with a durable **All-weather Environmental Feature-Set**, SunBriteTV televisions are designed for permanent outdoor installation:

- The extra bright 46-inch full-HD 1080p LCD screen is integrated into an all-weather ASA outdoor-rated resin exterior that protects the internal components from rain, dirt, insects and scratches.
- **Multi-fan Airflow System** keeps the unit cool and dry in temperatures up to 122 degrees F.
- **Innovative Water-tight Cable Entry System** with pass-through design keeps cables dry and allows for easy hook-ups.
- Includes Outdoor Dust Cover

The **Control Feature-Set** maximizes system integration and programming security:


- **Discrete IR** input control, concealed IR window
- **Remote Control Lock-out** prevents unauthorized users from changing the programming.
- **Sleep Mode** automatically turns the TV to the Off mode when the signal is removed, and turns it back to On when the signal is restored.

Model 4660HD

Model 4660HD is a bright 46" full-HD 1080p LCD all-weather outdoor television.

Specifications

LCD Screen	46-inch diagonal TFT Active Matrix
Resolution	1920 x 1080 full-HD 1080p
Aspect Ratio	16:9
Contrast Ratio	4000:1
Viewing Angle	176° x 176°
Response Time	8.0 milliseconds
TV formats	1080p, 1080i, 720p, 480p, 480i
Anti-Reflective Window	Not Applicable
Input Connectors:	
RF	Antenna/CATV (ATSC/QAM/NTSC) x1
HDMI	HDMI™ Input x4
Video Composite	S-Video x1 and Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x2
PC	15-pin D-sub VGA plus Stereo Audio
Control Set	Discrete IR Control, Concealed IR Window
Audio Out	TosLink Digital Optical x1
Speakers	20-watt Built-in Speakers
Exterior	Outdoor rated ASA plastic resin
Input Power	100-240 VAC, 50-60 Hz 2.8 A Max
Operating Temp.	-10° to 122° F. (-31° to 50° C.) *
Heater Boards	Not Applicable
Non-op. Temp. (Off-mode with power applied)	-10° to 140° F. (-31° to 60° C.) The non-operating temperature feature requires power to be applied
Accessories Included	Water-resistant remote control
TV Dimensions	45.51" W x 29.13" H x 6.68" D
Shipping Dimensions	52" W x 42" H x 13" D
Weight	65.0 lbs.
Shipping Weight	113.0 lbs.
Warranty	Two-year residential, in-factory, parts and labor

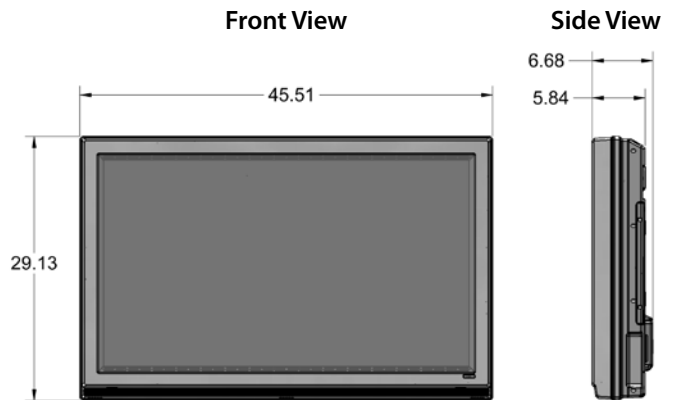

All measurements are in inches

Optional Accessories

SB-WM46	Articulating wall mount with tilt and swivel, arm and pan. Dual arm articulation extends to 21". Customized to fit--includes stainless steel and/or zinc-plated hardware.
SB-WM46NA	Wall mount with tilt--non articulating. Customized to fit--includes stainless steel and/or zinc-plated hardware.
SB-CM46A12 SB-CM46A12 B	Ceiling mount with tilt. Includes adjustable extension column provides up to 6" above unit to ceiling in <u>above unit</u> to ceiling in 1" increments without disassembly, and speed connect ceiling plate. Meets VESA standards.
SB-DP46XA SB-DP46XA B	Deck/Planter pole (Requires purchase of wall mount SB-WM46 or SB-WM46NA). Special order item.
SB-FMT32	RadioFM™ transmits audio from TV to FM radio
SB-TS46 SB-TS46 B	Removable table top stand. TV with table top stand is 30.58" H x 11.70" D; 9.5 lbs.

*Temperature range is for operation in shaded location.

Specifications may be subject to change.

Patent pending. All rights reserved. (C) 2011 SunBriteTV® LLC Rev. 4660HD -1109